


MANUAL

MANUAL BLINDS BETWEEN GLASS

Model	Inner Glass	Spacer	Outer Glass	Overall Thickness	Shadings
MBG01	1/8"	3/4"	1/8"	1"	Blinds
	1/5"	3/4"	1/5"	1 1/7"	Blinds
MBG02	1/8"	1 1/16"	1/8"	1 1/3"	Blinds/Pleat
	1/5"	1 1/16"	1/5"	1 1/2"	Blinds/Pleat

Remark: More glass category, glass thickness and coated are optional.

SIZE RANGE

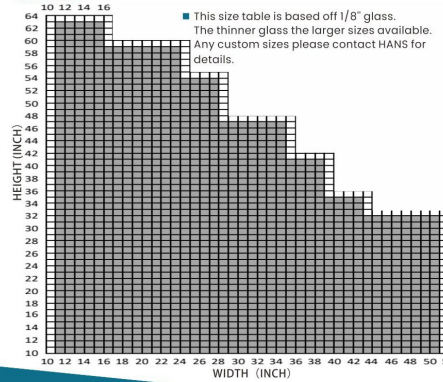

BLINDS COLOR OPTIONS:



Colors may differ due to printing. Please refer to HANS color table for precise color options.

DETAILS:

- Dimensions
 - a) Max Width: 51"
 - b) Max Height: 63"
 - c) Max ft²: 11 ft² (1/8" glass)
38 ft² (1/5" glass)
- Tempered or Annealed Glass, Low-E Glass

FEATURES:

- Raise, lower, and tilt blinds (Ideal for windows, doors and sunrooms)
- Blinds between sealed glass, inert argon gas content up to 80%
- Condensation Resistance at -76°F (-60°C)
- Single operator or dual operators, cordless
- Transparent operator track does not affect the overall appearance
- UV Resistant Blinds, non-dusting
- Allow to meet standard of NFRC and Energy Star
- Successfully tested over 60,000 cycles
- Energy efficient Low-E available in all sizes

