




Ritec ClearShield® Durable 'Non-Stick'  
Easy-Clean Glass Surface Protection



# NEW! ClearPad™ VPIR-200

vertical pad Ritec ClearShield® application with IR pre-heating  
PROCESS FASTER • LESS LABOR • INCREASE PROFIT

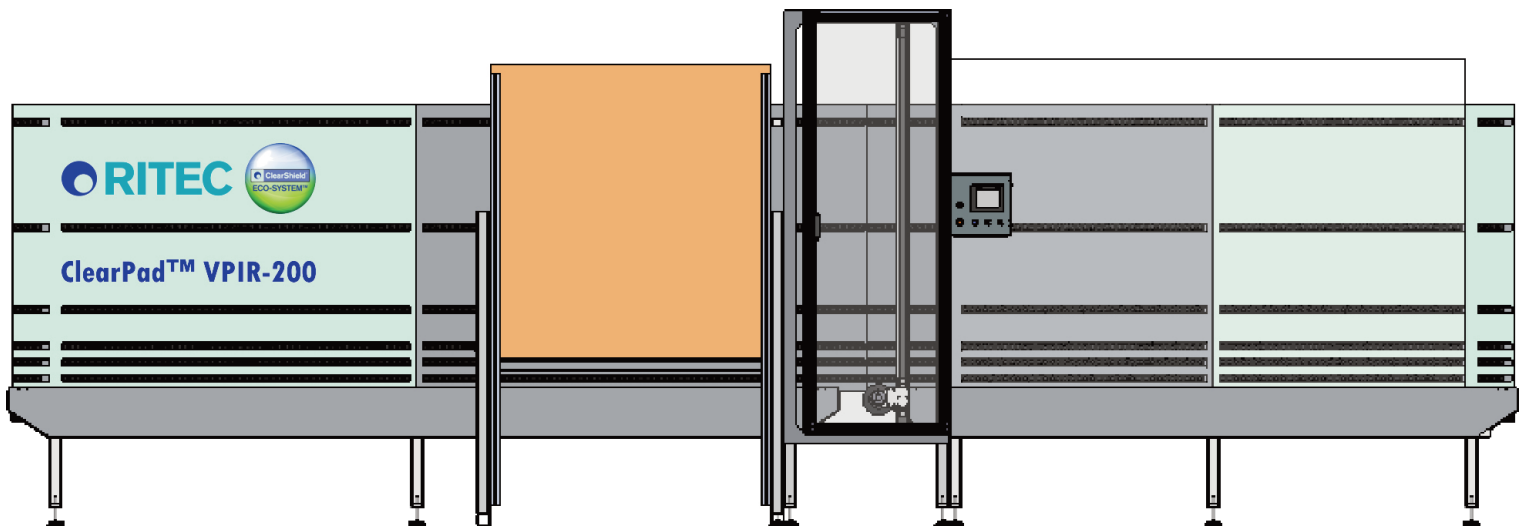

- The most efficient way of pad-applying Ritec ClearShield®
- Reduces handling, labor costs and application training
- Faster production with IR pre-heating for instant curing
- Increased and consistent coverage rate
- Management and control software to maximize product usage and avoid waste
- Small footprint



## TECHNICAL SPECIFICATIONS

<b>Model:</b>	ClearPad™ VPIR-200
<b>Construction:</b>	Powder coated mild steel frame
<b>Power Consumption:</b>	10kW
<b>Voltage:</b>	380 - 415V
<b>Footprint:</b>	Width 23' 10 5/8" (7280mm) Height 8' 2 5/8" (2505mm) Depth 2' 9" (838mm)
<b>Rate per Hour (linear):</b>	394 linear feet (120 linear meters)
<b>Rate per Hour (area):</b>	2,067ft <sup>2</sup> (192m <sup>2</sup> )
<b>Minimum Glass Size:</b>	Width 1' 7 11/16" (500mm) Height 7 7/8" (200mm) Thickness 5/64" (2mm)
<b>Maximum Glass Size:</b>	Width 8' 3" (2500mm) Height 5' 3" (1600mm) Thickness 25/32" (20mm)
<b>Actuator:</b>	Linear

All specifications correct at time of printing (May 2022). Ritec International Limited reserve the right to change or modify specifications and / or parts without prior notice.

### ClearShield Technologies LLC

A subsidiary of Ritec International Limited, UK

1-847-671-4584

[info@clearshieldonline.com](mailto:info@clearshieldonline.com)

[www.clearshieldonline.com](http://www.clearshieldonline.com)