


American systems



Single-Hung System

In the Single-Hung window, as in the Double-Hung structures, the range of sash operation occurs only in the vertical direction. The main factor distinguishing the Single-Hung window is its upper part, which is designed as a fixed glazing.

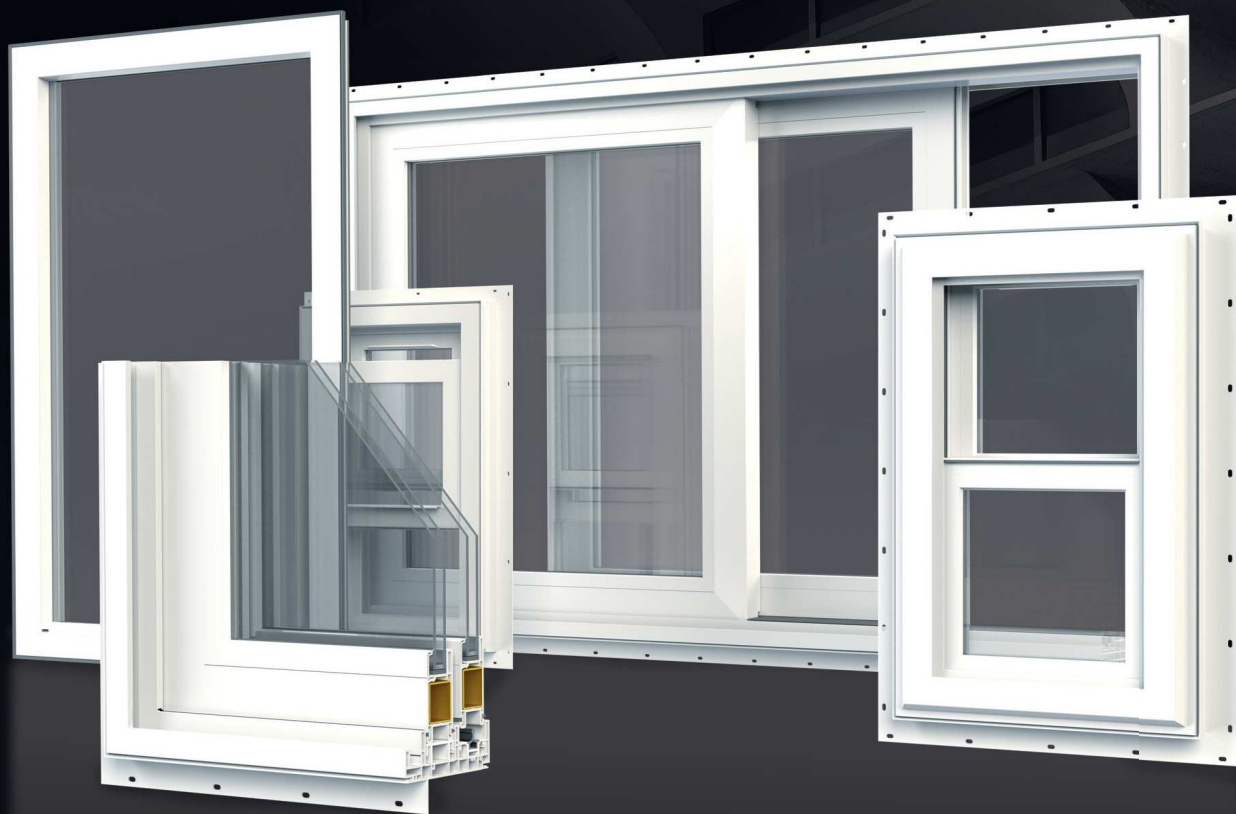

- Integrated flipper suitable for the new-construction type of windows
- The top chamber is made as a fixed glazing in the frame
- It is possible to manufacture a frame designed for the replacement-type of windows
- Triple labyrinth lock sealing
- Integrated accessory slots
- Installation depth 82.55 mm (3")
- Glazing range up to 20 mm
- Glazing of the sashes on the outside
- Handle integrated in the sash frame
- Specially designed chamber in the frame and in the fixed post, intended for mounting a mosquito net
- Integrated sloped sill for rainwater drainage
- Unique rib to stiffen the sill, preventing deformation of the structure